

KS-1132

> Self-Service Payment Kiosk

NEW



Features



- 21.5" Full HD TFT-LCD
- Projected capacitive touch panel
- Embedded with 1D/2D barcode scanner
- Embedded with 2" or 3" thermal printer
- Embedded with MSR/IC card reader & face camera
- Portable box PC for easy maintenance
- Customizable payment terminal bracket
- Simple structure and easy maintenance

Applications

- Retail and chain store service kiosk
- Food ordering and payment kiosk
- Ticket selling service kiosk
- City information and coupon kiosk

Highlights




*All information contained in this document is subject to change without prior notice. Please log on www.woah-technology.com to acquire latest information.

Specifications



System	CPU	High-End: Intel® Celeron G3930TE Intel® 7th Gen. Core™ i7-7700T Intel® 7th Gen. Core™ i5-7500T Intel® 7th Gen. Core™ i3-7101TE Entry Level: Intel® Celeron J1900
	Memory	High-End: Max. up to 16GB DDR4 SO-DIMM memory Entry Level: Max. up to 8GB DDR3L SO-DIMM memory
	HDD	1 x 500GB 2.5" SATA HDD
	Network	Gigabit 10/100/1000 Base-T Fast Ethernet
	Power Supply	1 x 12V power supply
	System Weight	40 kg
	Dimensions (W x H x D)	385 x 1105 x 175 mm
	O.S. Support	Windows 10 / Windows 7 / POSReady 7
	Operating Display	LCD
Max. Resolution		1920 x 1080
Brightness		250 cd/m ²
Touchscreen		Projected capacitive touch
Viewing Angle		Horizontal: (R) 89°/(L) 89° Vertical: (U) 89°/(L) 89°
Add-ons	Thermal Printer	2" or 3" standalone thermal printer for 58 mm or 80 mm paper roll
	Barcode Scanner	1D/2D barcode scanner
	MSR/IC Card Reader	RS232 interface of the hybrid card reader intended to read ISO/JIS II format magnetic card and read/write ISO7816/EMV/memory chip smart card
	Face Camera	16:9 2.1M-Pixels Full HD H.264 PC camera
	Credit Card	Based on customer requirements
	e-Payment	Based on customer requirements
Environment	RFID	Read/Write ISO 14443A Mifare
	EMC & Safety	CE / FCC
	Operating Temp.	0°C~35°C
	Storage Temp.	-5°C~60°C
	Humidity	20%~85% (no condensation)

Dimensions

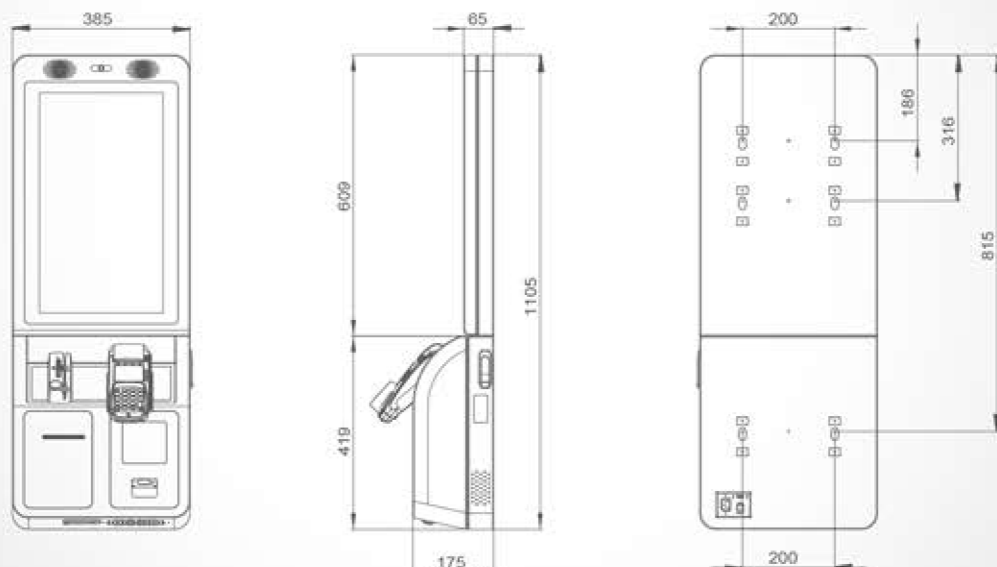

unit: mm