

KS-1130

› Self-Service Payment Kiosk

NEW



Features



- 32" Full HD TFT-LCD
- Projected capacitive touch panel
- Embedded with 1D/2D barcode scanner
- Embedded with 2" or 3" thermal printer
- Embedded with MSR/IC card reader & face camera
- Portable box PC for easy maintenance
- Customizable payment terminal bracket
- Simple structure and easy maintenance


Applications

- Retail and chain store service kiosk
- Food ordering and payment kiosk
- Ticket selling service kiosk
- City information and coupon kiosk

Highlights



Power & Ethernet

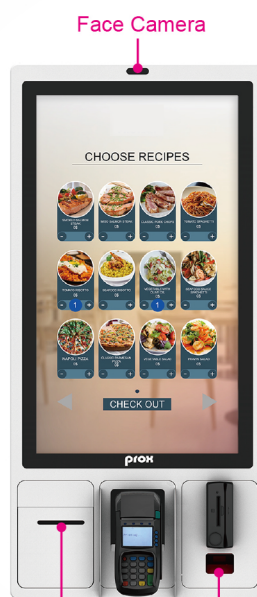

Thermal Printer Barcode Scanner



Credit Card Reader (Customer Assigned)

System Door

32" Touch Panel

MSR/IC Card Reader


*All information contained in this document is subject to change without prior notice. Please log on www.woah-technology.com to acquire latest information.

Specifications



System	CPU	High-End: i5-6500/ i3-6100 Entry: Atom™ J1900
	Memory	High-End: Max. up to 16GB DDR4 memory Entry: Max. up to 8GB DDR3L SO-DIMM memory
	HDD	1 x 500GB 2.5" SATA HDD
	Network	Gigabit 10/100/1000 Base-T Fast Ethernet
	Power Supply	1 x 12V power supply / 1 x 24V power supply
	System Weight	55 kg
	Dimensions (W x H x D)	500 x 1050 x 150 mm
	O.S. Support	Windows 10 / Windows 7 / POSReady 7
Operating Display	LCD	31.5" TFT LCD
	Max. Resolution	1920 x 1080
	Brightness	500 cd/m ²
	Touchscreen	Projected capacitive touch
	Viewing Angle	Horizontal: (R) 89°/(L) 89° Vertical: (U) 89°/(L) 89°
Add-ons	Thermal Printer	2" or 3" Standalone thermal printer for 58 mm or 80 mm paper roll
	Barcode Scanner	1D/2D barcode scanner
	MSR/IC Card Reader	RS232 interface of the hybrid card reader intended to read ISO/JIS II format magnetic card and read/write ISO7816/EMV/memory chip smart card
	Face Camera	16:9 2.1M-Pixels Full HD H.264 PC camera
	Credit Card	Based on customer requirements
	e-Payment	Based on customer requirements
	RFID	Read/Write ISO 14443A Mifare
Environment	EMC & Safety	CE / FCC
	Operating Temp.	0°C~35°C
	Storage Temp.	-5°C~60°C
	Humidity	20%~85% (no condensation)

Dimensions

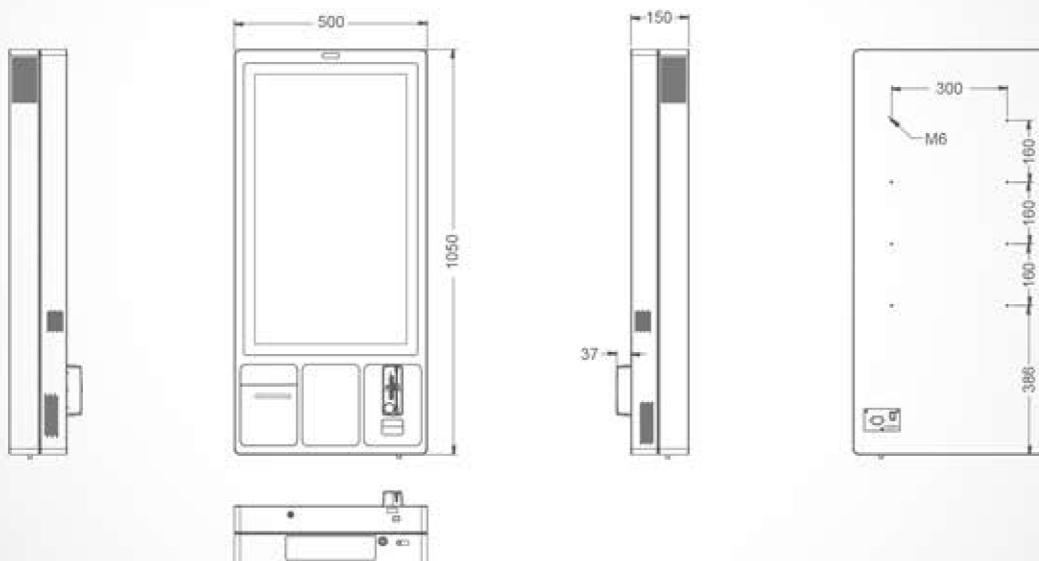

unit: mm